


## Benefits:

- A magnetic mount antenna for steel surfaces
- Suitable for indoor and outdoor installation
- RF-Cable attached to the antenna
- High efficiency and reliability through vehicle considered construction
- Placing of radiator system in plastic housing protected of dirt and corrosion
- Optimal broadcasting and receiving

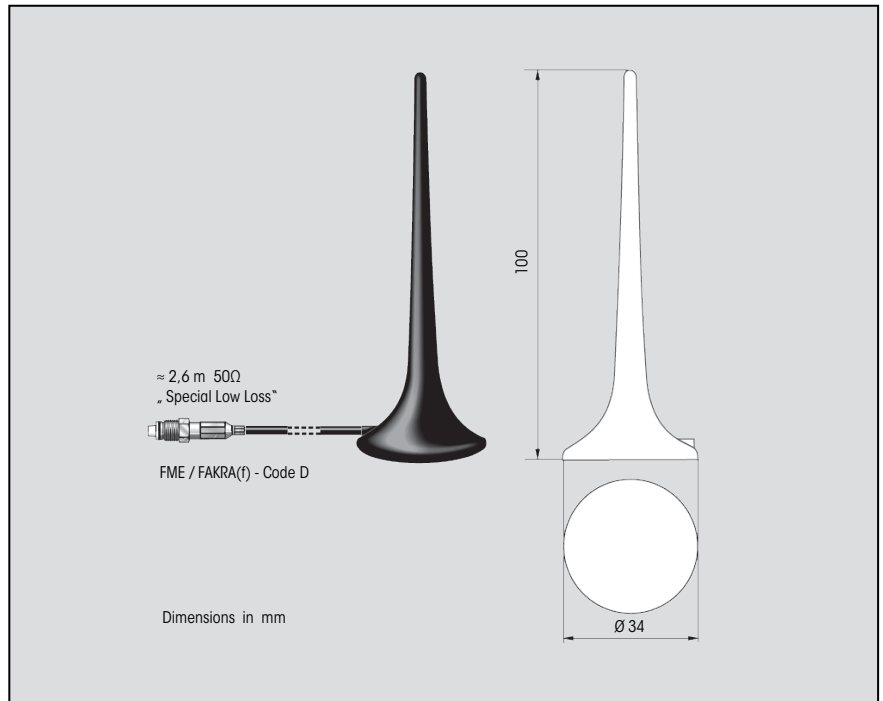

## Electrical Parameters

- Frequency Ranges GSM 900 / GSM 1800
- Frequencies (in MHz) 890-960 / 1710-1880
- VSWR  $\leq 2 : 1$
- Return Loss  $\approx 10$  dB
- Gain  $\approx 0$  dBi
- Impedance  $50 \Omega$
- Max. power 10 W
- Cable 2,6 m „Special Low Loss“
- Connector FME  
FAKRA(f) - Code D  
SMA
- Order Number: 310068 (FME)  
816645 (FAKRA(f) - Code D)  
310143 (SMA)

## Return Loss

