


Benefits


- Suitable for indoor installation
- High performance and reliability due to quality construction
- Low loss cable for small losses
- The RF-cable is connected fixed to connectors

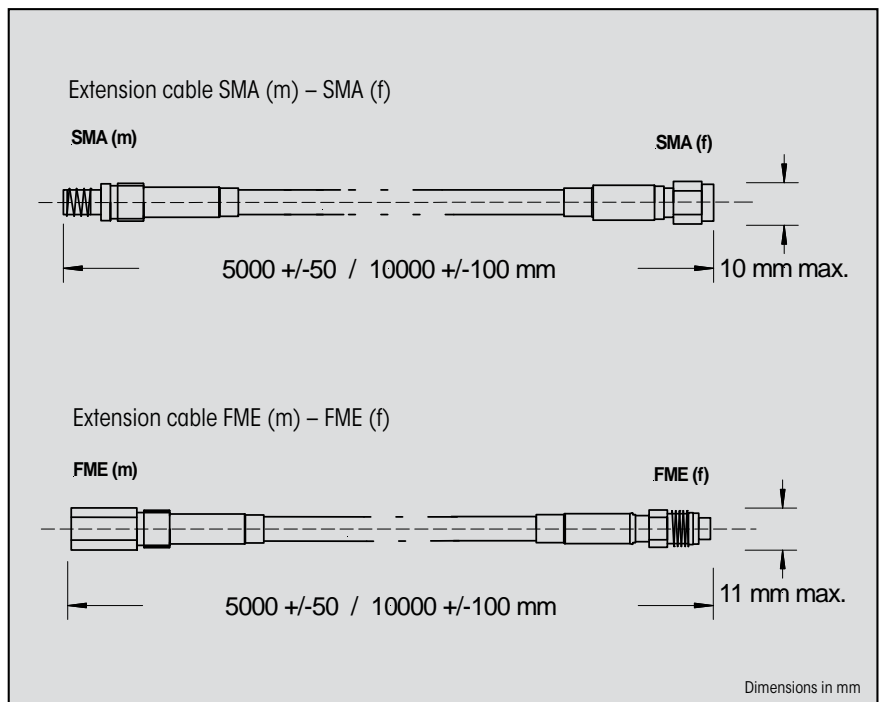

Technical Data

Frequencies	790 MHz	960 MHz	1710 MHz	2170 MHz	2500 MHz	2700 MHz
Transmission loss (5 m)	-1,5 dB	-1,7 dB	-2,4 dB	-2,7 dB	-2,9 dB	-3,1 dB
Transmission loss (10 m)	-3,0 dB	-3,4 dB	-4,8 dB	-5,4 dB	-5,8 dB	-6,2 dB
Return loss	≤ -20 dB		≤ -18 dB		≤ -16 dB	
Impedance	50 Ohm					
Cable	Low Loss (outside diameter = 5,5mm; bending radius = 40mm)					

Loss diagram

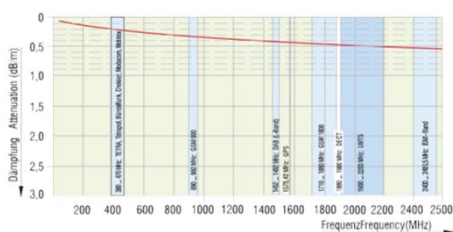

Order Number	Cable	Connector
316466	5 m	SMA (m) - SMA (f)
316473	10 m	SMA (m) - SMA (f)
316428	5 m	FME (m) - FME (f)
316435	10 m	FME (m) - FME (f)