

# Sagemcom



## Siconia<sup>®</sup> EG25

Smart gas industrial meter  
for amr system

## Description

The Siconia® EG25 meter is a volumetric measuring instrument with deformable walls for natural gas, manufactured gas, LPG, and technical gases, designed for residential/industrial use. It is designed and built according to the highest standards, and in compliance with the EN1359 standard and the MID directive. Measurement precision and accuracy is guaranteed by the production and control process, and by an automated calibration system, which is used at the internal Metrological Laboratory upon 100% of the meters produced.

The quality of the plastic and metal components renders the meters highly sensitive, even with a minimal gas flow, and ensures excellent performance over time.

The accuracy and reliability of the measurement over time is guaranteed by the consolidated mechanical principle of the measurement itself, which is performed using a membrane and spool valve system. The EG25 model is the "electronic" version of Sagemcom's traditional mechanical meter, and has an integrated electronic module with the following features and functions:

- LCD display with multilevel menu
- Logging of consumption values
- Remote transmission of the readings (compensated by temperature and pressure)


The EG25 meter performs the PT type conversion of the volume under the standard reference conditions (base conditions). The protection of the data and the security of the programming parameters are ensured by sealable switches and programmable passwords.

The meters are battery powered. The EG25 is part of Siconia® Smart Gas metering solution including central Head End System and Meter Data Management system.

### REFERENCES

European Directive 2014/32/EU (MID) and 2014/34/EU (ATEX)  
EN 1359:1998/A1:2006 Standard  
OIML R137-1&2:2012  
WELMEC 7.2

## Product details

Model	EG25
Type	Smart
Class	G25
Max. operating pressure (mbar)	500
Min. flow rate (m <sup>3</sup> /h)	0,25
Max. flow rate (m <sup>3</sup> /h)	40
Standard connection (according to ISO 228-1)	2 ½"
Operating temperature range	-25 °C / + 55 °C
Storage temperature	-25 °C / + 70 °C
Base temperature conditions	15 °C
Protection rating	IP66
Mechanical class	M2
Electromagnetic environment	E1
Cyclic volume	10 dm <sup>3</sup>
Dimensions	A: 335mm, B: 422,5mm, C: 472,8mm, D: 327,1mm, E: 142,9mm 
Weight	15,7 kg

## Characteristics

- Casing in galvanized sheet steel with polyester paint
- Electronics housing in Polycarbonate and ABS
- Class 1.5 High stability of measurement
- Digital temperature sensor and high accuracy pressure sensor (0,8 to 1,5 bar)
- Setting of gas composition
- C factor calculation according to SGER88
- Base volume, valve status and alarms indication
- One battery for metrological unit and one battery for the communication module (15 years each)
- Alphanumeric LCD display
- Integrated tamper protection
- 6 user button keypad for parameter setting
- Internal data base for hourly and daily consumption profile (up to 70 days), events and alarms (up to 1000)
- ATEX Zone 1-II 2G Ex ib [Ex ia Ga] IIB T3 Gb (- 25 °C ≤ Tamb ≤ + 70 °C)

## Data communication

Point to Point cellular communication :  
GSM/GPRS, NB-IoT NB1/2  
UNI TS 11291 Protocol, DLMS protocol  
Pulse output for customer connection  
Remote antenna option


## Functionality

The pressure difference between the meter's intake and outlet results in the cyclic filling and emptying of the measuring chamber via the alternating movement of the deformable membrane.

The motion is converted into electrical pulse signals via the kinematic measuring system, which consists of spool valves with a connecting rod/crank coupling, and an electronic transducer module. These signals are then transmitted to the metrology card.

The temperature sensor for volume correction is installed on the transducer module, and is equipped with an effective fraud detection system.

A pressure sensor is also installed on the metal body in order to compensate for the measured volumes.

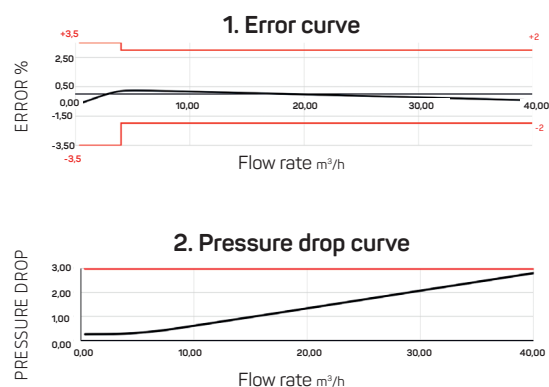

All rights reserved. The information and specifications included are subject to change without prior notice. Sagemcom Energy & Telecom tries to ensure that all information in this document is correct, but does not accept liability for error or omission. Non contractual document. All trademarks are registered by their respective owners. Simplified joint stock company Capital 25 605 811.80 Euros - 518 250 337 RCS Nanterre. 11/2021

## Sagemcom Energy & Telecom SAS

Headquarters : 250, route de l'Empereur  
92848 Rueil-Malmaison Cedex - FRANCE

Tel : +33 (0)1 57 61 10 00 - Fax : +33 (0)1 57 61 10 01

www.sagemcom.com

**Sagemcom**